

4900 HI

Sliding

Standard sliding system with hinged features. Offers great thermal and acoustic performance favoured by a glazing capacity of up to 36 mm and a thermal break zone of 34 mm. It has a interlock section of 35 mm and straight lines, allowing the sashes to cross over thanks to the integrated handle with multilock system.



OPENING POSSIBILITIES

→

←

→

←

←

→

←

→

←

→

←

→

←

→

←

→

←

→


←

Sliding  
1 rail (sash + fixed light)  
2 and 3 rails  
Pocket possibility  
Possibility of 90° opening without mullion

POSSIBILITIES



ACCESSIBILITY

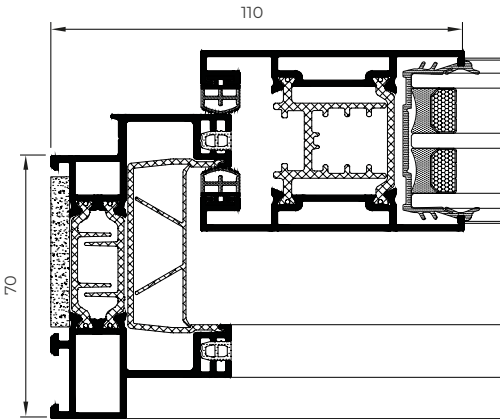

FEATURES

Transmittance		$U_w \geq 1.2$ (W/m²K)
Acoustic insulation		Rw up to 40 dB
Air permeability		Class 4
Water tightness		Class 7A
Wind resistance		Class C5

Reference test 1.80 x 2.20 m / 2 sashes  
CSTB Laboratory DTA Certification

Sliding

Thermally broken



4900 HI SLIDING

- Sightlines**  
Frame 60, 70, 89, 120, 125, 130 mm  
126, 145 mm 3 rails  
201 mm 4 rails  
Sash 48 mm

**Polyamide Strip Length**  
34 mm

**Profile Thickness**  
Window 1,6 mm

**Glazing**  
Max. 36 mm, Min. 24 mm

**Maximum Sash Dimensions**  
Width (L) 2200 mm  
Height (H) 3000 mm

**Maximum Sash Weight**  
240 kg

Consult maximum weight and dimensions according to typologies